COLARUS GROUP

+1-877-359-1257 (Toll Free)
+1-238-938-1727
+1-905-594-1727


Plug Cored

Malleable Black Iron

A cored plug is used to mount at the pipe end by threaded connection with protruded end at other side, to block the pipeline and form a liquid or gas-tight seal

Standard:	EN10242 / ANSI / ASME B16.3 / DIN2950 / ISO49 / NBR6943 / Is1879 / EN10242
Thread Standard:	EN10226 / ASME B1.20.1 / DIN 2999 ISO-1 / ISO228 / IS 554 / BS EN10226
Working Pressure	PN 25 / 2.5 MPA / CLASS 150 / 25 BAR



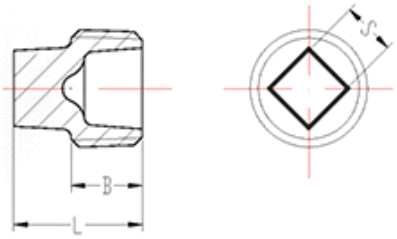

Product Code	Product Description	Size	DN	L	B	S	Weight	PSI
		(ANSI)	(mm)	(mm)	(mm)	(mm)	(g)	
PLGC-14-MBK	Plug Cored- 1/4" Malleable Black Iron	1/4"	8	15.5	10	6	8.82	150
PLGC-38-MBK	Plug Cored- 3/8" Malleable Black Iron	3/8"	10	17	10	7	15.68	150
PLGC-12-MBK	Plug Cored- 1/2" Malleable Black Iron	1/2"	15	22.5	13	10	24.5	150
PLGC-34-MBK	Plug Cored- 3/4" Malleable Black Iron	3/4"	20	24	14	12	36.26	150
PLGC-1-MBK	Plug Cored- 1" Malleable Black Iron	1"	25	27	16.5	15	57.82	150
PLGC-114-MBK	Plug Cored- 1-1/4" Malleable Black Iron	1-1/4"	32	30	20	18	103.88	150
PLGC-112-MBK	Plug Cored- 1-1/2" Malleable Black Iron	1-1/2"	40	31	21	22	140.14	150
PLGC-2-MBK	Plug Cored- 2" Malleable Black Iron	2"	50	36	25	26	230.3	150

Working Pressure : 25BAR / 363PSI / MPA / CLASS / PN 25
Temperature : 200 °c (392°F)
Tensile Strength : ≥350MPA
Elongation : ≥10%
Hardness : ≤HB150

UL LISTED

FM APPROVED

3588 Grassie Road, Grassie.
ON, Canada. L0R 1M0
E-mail: sales@colarusgroup.ca
E-mail: colarusgroup@gmail.com