



COLARUS GROUP

+1-877-359-1257 (Toll Free)

+1-238-938-1727

+1-905-594-1727


TEE Reducing

Malleable Black Iron



The reducing tee is used to change the size of the fluid branch. Reducing fittings can change the size of the shunt, Malleable iron pipe Fittings Tee Reducing, using malleable cast iron material, main outlet size, and branch outlet size is different

Standard:	EN10242 / ANSI / ASME B16.3 / DIN2950 / ISO49 / NBR6943 / Is1879 / EN10242
Thread Standard:	EN10226 / ASME B1.20.1 / DIN 2999 ISO-1 / ISO228 / IS 554 / BS EN10226
Working Pressure	PN 25 / 2.5 MPA / CLASS 150 / 25 BAR

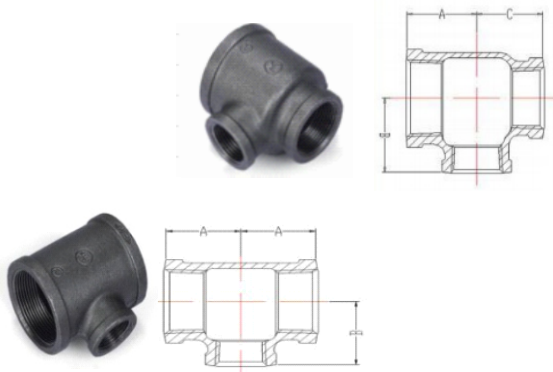

Product Code	Size	A	B	Weight
	(ANSI)	(mm)	(mm)	(g)
TEER-12-12-34-MBK	1/2" X 1/2" X 3/4"	30	29	163
TEER-12-12-1-MBK	1/2" X 1/2" X 1"	33	31	203
TEER-34-34-1-MBK	3/4" X 3/4" X 1"	35	34	239
TEER-34-34-1/4-MBK	3/4" X 3/4" X 1-1/4"	40	36	293
TEER-1-1-1/4-MBK	1" X 1" X 1-1/4"	41	40	363
TEER-1-1-1/2-MBK	1" X 1" X 1-1/2"	45	41	415
TEER-1-1-2-MBK	1" X 1" X 2"	51	43	553
TEER-1/4-1/4-1/2-MBK	1-1/4" X 1-1/4" X 1-1/2"	47	45	525
TEER-1/4-1/4-2-MBK	1-1/4" X 1-1/4" X 2"	53	47	655
TEER-1/2-1/2-2-MBK	1-1/2" X 1-1/2" X 2"	54	51	726
TEER-1/2-1/2-2 1/2-MBK	1-1/2" X 1-1/2" X 2-1/2"	61	54.5	897
TEER-1/2-1/2-3-MBK	1-1/2" X 1-1/2" X 3"	71	57.5	1078
TEER-2-2-1/2-MBK	2" X 2" X 1-1/2"	63	58	1046
TEER-2-2-3-MBK	2" X 2" X 3"	71	61.5	1364

Product Code	Size	A	B	C	Weight
	(ANSI)	(mm)	(mm)	(mm)	(g)
Tee-34-12-12-MBK	3/4" x 1/2" x 1/2"	29	30	27	159.74
Tee-1-12-34-MBK	1" x 1/2" x 3/4"	31	33	29	191.1
Tee-1-34-34-MBK	1" x 3/4" x 3/4"	34	35	32	157.78
Tee-1/4-12-1-MBK	1-1/4" x 1/2" x 1"	33	37	31	234.22
Tee-1/4-34-1-MBK	1-1/4" x 3/4" x 1"	36	40	34	287.14
Tee-1/4-1-1-MBK	1-1/4" x 1" x 1"	39	40	36	355.74
Tee-1/4-1/4-1-MBK	1-1/4" x 1-1/4" x 1"	44.5	44.5	41	406.7
Tee-1/2-12-1/4-MBK	1-1/2" x 1/2" x 1-1/4"	35	41	33	539.98
Tee-1/2-34-1/4-MBK	1-1/2" x 3/4" x 1-1/4"	37	43	36	514.5
Tee-1/2-1-1-MBK	1-1/2" x 1" x 1"	40	44	36	641.9
Tee-1/2-1-1/4-MBK	1-1/2" x 1" x 1-1/4"	41	45	40	711.48
Tee-1/2-1/4-1-MBK	1-1/2" x 1-1/4" x 1"	45	47	41	879.06
Tee-1/2-1/4-1/4-MBK	1-1/2" x 1-1/4" x 1-1/4"	45	47	44.5	1056.44
Tee-1/2-1/2-1-MBK	1-1/2" x 1-1/2" x 1"	48.5	48.5	45	1046
Tee-1/2-2-1/4-MBK	1-1/2" x 2" x 1-1/4"	54	51	53	1364
Tee-2-12-1/2-MBK	2" x 1/2" x 1-1/2"	37	47	35	1622.88
Tee-2-34-1/2-MBK	2" x 3/4" x 1-1/2"	40	49	37	2530.36
Tee-2-1-1/4-MBK	2" x 1" x 1-1/4"	43	51	40	299.88
Tee-2-1-1/2-MBK	2" x 1" x 1-1/2"	42	49	40	344.96
Tee-2-1/4-1/4-MBK	2" x 1-1/4" x 1-1/4"	47	53	44.5	392
Tee-2-1/4-1/2-MBK	2" x 1-1/4" x 1-1/2"	47	53	45	491.96
Tee-2-1/4-1-MBK	2" x 1-1/4" x 1"	51	54	45	377.3
Tee-2-1/2-1/2-MBK	2" x 1-1/2" x 1-1/2"	51	54	48.5	406.7
Tee-2-2-1-MBK	2" x 1" x 1"	57	57	51	451.78

Working Pressure : 25BAR / 363PSI / MPA / CLASS / PN 25
 Temperature : 200 °c (392°F)
 Tensile Strength : ≥350MPA
 Elongation : ≥10%
 Hardness : ≤HB150



3588 Grassie Road, Grassie.
 ON, Canada. L0R 1M0
 E-mail: sales@colarusgroup.ca
 E-mail: colarusgroup@gmail.com

